
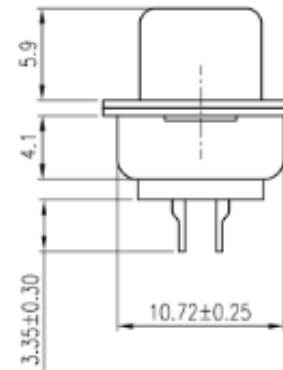


NOTES:

1. SHELL: STEEL, SELECTIVE 100µ" MIN. TIN OVER 50µ" MIN. NICKEL PLATING
2. CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATED ON CONTACT, GOLD FLASH OR 100µ" MIN TIN PLATING ON SOLDER AREA, 50µ" NICKEL UNDER-PLATING OVERALL
3. INSULATOR: PBT, UL 94V-0, COLOR- BLACK
4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.
5. ▽ ARE CRITICAL DIMENSIONS

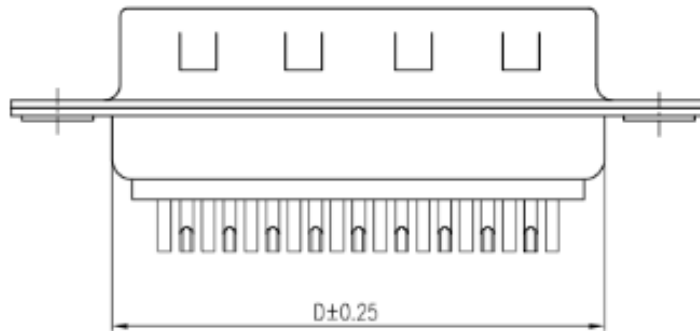

PART NUMBERS	NO. OF CONTACTS	DIM. A	DIM. B	DIM. C	DIM. D	TOLERANCE m/m		APPROVALS	DATE	TITLE	SCALE N.A. SHEET 1 OF 1			
											SIZE	PART NO.	DWG NO.	REV.
DB-19P male solder cup	19	44.70	38.79	30.72	32.25	x.	±0.30	DRAWN		DB-19P SOLDER-POT TERMINATION PLUG				
						x.X	±0.25	CHECKED						
						x.XX	±0.15							
						x.XXX	±0.08	APPROVED						
						ANGULAR	±2°							
						UNLESS OTHERWISE SPECIFIED				UNIT	MM			